

LC-400






NOT containing substances listed in RoHS directive

NOT containing substances listed in ELV directive

Boron-free


Nitrite-free

Inhibits corrosion and rusting for aluminium and aluminium alloys

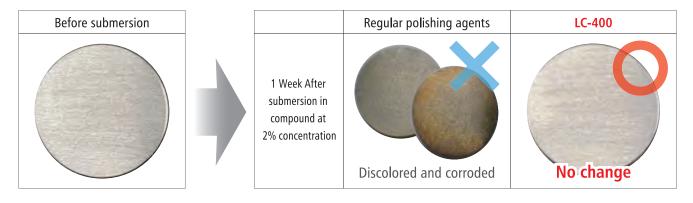

By selecting the suitable compound, its results stay for longer; creating an even bigger difference to its competitors over time.



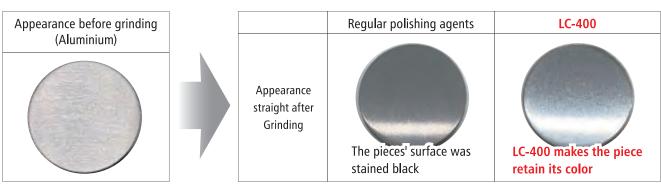

*Internal evaluation

Specifications	LC-400
pH (1% solution)	8.5 *Representative value
BOD, COD (0.1% solution)	BOD:230mg/L, COD:150mg/L
Phosphorus, nitrogen (Undiluted solution)	Phosphorus:0.6wt%, Nitrogen:0.7wt%
Loading amount (per 1 liter of water)	10~20g
Package	18Kg/can

*Please refer to the SDS for safety instructions for handling

Contact for product information and purchase



Head Office 3-19-21 Toyoda, Minami-Ku, Nagoya, Aichi Prefecture 457-8566 Japan

Tel: +81-52-692-6666 Fax: +81-52-692-9445

3-19-21 Toyoda, Minami-Ku, Nagoya, Aichi Prefecture 457-8566 Japan Overseas Sales

Tel: +81-52-692-0901 Fax: +81-52-692-9445

Tobishima Factory 3-25-1 Odakara, Tobishima-Mura, Ama-Gun, Aichi Prefecture 490-1438 Japan Tel: +81-567-56-7500 Fax: +81-567-56-7513

https://www.tipton.co.jp/english/ E-mail overseas@tipton.co.jp